

1. DESCRIPTION

Weldable hot rolled and cold stretched ribbed steel wire in coils for concrete reinforcement, steel grade B500B, according to DIN 488 (Germany), NF A 35-080-1 (France), SIA 262 (Switzerland), NEN 6008 and BRL 0501 (Netherlands), HRN 1130-2 B500B (Croatia), STS-24/0005 B500B (Slovenia) and EN10080 standards.

2. HEAT CHEMICAL COMPOSITION

	Limits	C %	P %	S %	Cu %	N %	Ceq %
DIN 488	max	0.22	0.050	0.050	0.60	0.012	0.50
NF A 35-080-1	max	0.22*	0.050	0.050	0.80	0.012	0.50
SIA 262	max	0.22*	0.050	0.050	0.60	0.012	0.50
NEN 6008	max	0.22	0.050	0.050	0.80	0.012	0.50
HRN 1130-2	max	0.22	0.050	0.050	0.60	0.012	0.50
STS-24/0005	max	0.22	0.050	0.050	0.60	0.012	0.50
EN 10080	max	0.22*	0.050	0.050	0.80	0.012	0.50

* C max 0.25% is permitted, provided that Ceq max is 0.48%.

3. MECHANICAL AND DIMENSIONAL PROPERTIES

Standard	Steel Grade	Diameter mm	Weight tol. %	Re min MPa	Re max MPa	Rm/Re min	Agt min %	Bend test
DIN 488	B500B	8 ÷ 16	-4/ +6	500c	650c	1.08c	5.0c	note 2
NF A 35-080-1	B500B	8 ÷ 16	± 4,5	500c	650c	1.08c	5.0c	note 2
SIA 262	B500B	8 ÷ 16	note 3	500c	650c	1.08c	5.0c	note 2
NEN 6008 / BRL 0501	B500B	8 ÷ 16	± 4,5	500c	-	1.08c	5.5c	note 2
HRN 1130-2	B500B	8 ÷ 12	note 3	500c	650c	1.08c	5.0c	note 2
STS-24/0005	B500B	8 ÷ 12	note 3	500c	650c	1.08c	5.0c	note 2
EN 10080	-	8 ÷ 16	note 3	-	-	-	-	note 2

NOTES:

- test on sample straight by laboratory machine and aged 100°C/1h.
- diameter of the mandrel $D = k \cdot d$, bending angle 90°, re-bending angle 20° after aging 100°C/1h.
- ± 6 for $\varnothing \leq 8$ mm; ± 4.5 for $\varnothing > 8$ mm.
- Average and individual lower values of mechanical properties according to relevant standards.
- For Germany according to DIN 488 and Netherlands according to NEN 6008: $f_R \geq 0.052$ for diameter 8mm, $f_R \geq 0.060$ for diameter 10mm, $f_R \geq 0.065$ for diameter ≥ 12 mm. For France and Switzerland, $f_R \geq 0.040$ for diameter 8 ÷ 12mm, $f_R \geq 0.056$ for diameter ≥ 14 mm.

4. STANDARD PACKAGING

- Coils weight 2.5 t, height = 700 mm, int. diameter = 700mm, ext. diameter = approx. 1130 mm, tied with 4 single or double strips according to the diameter.
- Coils weight 5.0 t, height = 900 mm, int. diameter = 700mm, ext. diameter = approx. 1300 mm, tied with 4 double strips.

5. STANDARD IDENTIFICATION

Each coil with diameter painted on the surface and label reporting:

PITTINI
ACCIAIERIE DI VERONA S.p.A.
JUMBO STRETCHED B500B
DIAMETER mm
HEAT N°
NOMINAL WEIGHT kg
PACKAGING
DATE OF PRODUCTION
REFERENCE STANDARDS
PRODUCT CERTIFICATION LOGOS



Acciaierie di Verona S.p.A.
Plant
Lungadige A. Galtarossa, 21/c
37133 Verona
Tel.: +39 045 805111
Fax: +39 045 591564

Registered Office
Z.I. Rivoli
33010 Osoppo (UD)
Tel.: +39 0432 062811
Fax: +39 0432 062812
www.pittini.it

6. STANDARD CERTIFICATION


On demand certificate 3.1 according EN10204.

7. APPROVALS

PRÜFSTELLE FÜR BETONSTAHL (Germany), AFCAB (France), EMPA (Switzerland), KIWA (Netherlands), IGH (Croatia), ZAG (Slovenia).

8. IDENTIFICATION MARK

Mark 4-9

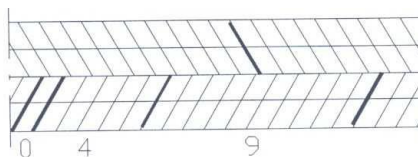

Acciaierie di Verona S.p.A.

Plant

Lungadige A. Galtarossa, 21/c
37133 Verona
Tel.: +39 045 805111
Fax: +39 045 591564

Registered Office

Z.I. Rivoli
33010 Osoppo (UD)
Tel.: +39 0432 062811
Fax: +39 0432 062812

www.pittini.it